


Controller SCU

The **Single Control Unit SCU** is suited for the operation of one device with one axis of motion. Those devices are usually used for the operation of turntables, cable guide rails or any other positioning equipment. This controller SCU permits the operation in manual, semi-automatic and remote control mode via IEEE 488.2 (GPIB bus).

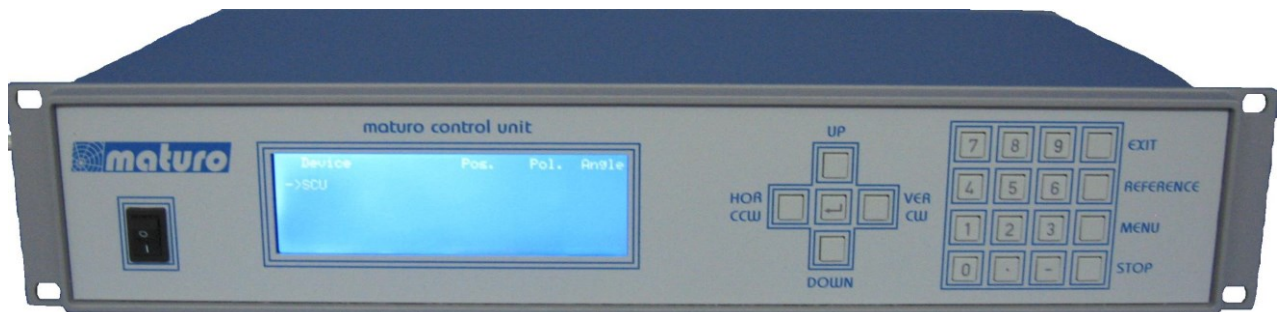

Technical Data

Data interface	IEEE 488.2 (GPIB-Bus)
Device interface	CAN-Bus via fibre optic cable
Transfer rate	100 baud
Display	4 x 40 characters
Voltage	110-230 VAC, 50/60 Hz, single phase
Current consumption	approx. 20W
Fuse	T 125mA, 250V
Size (W X D)	19" Rack mount (427 x 300 mm)
Height	2 HE (87 mm)
Temperature range	5°C - 40°C
Total weight	5 kg
Accessories	1.5 m power supply cable Service manual

The single control unit SCU works with EMC software from Rohde & Schwarz, Teseq, NEXIO, Toyo, TDK, DARE!! etc. The IEEE 488 (GPIB) is available as an interface device.

Information presented enclosed is subject to change as product enhancements are made regularly. Pictures included are for illustration purposes only and do not represent all possible configurations.