

Tektronix 5 Series MSO vs. Keysight S-Series

COMPETITIVE FACT SHEET

Oscilloscope Design

Tektronix 5 Series MSO

- ✓ **Industry First** FlexChannels (up to 8) (each input is 1 analog or 8 digital)
- ✓ **Industry First** 4, 6, 8 channel models
- ✓ **Industry First** HD 1920 x 1080 15.6" Multi-touch capacitive display
- ✓ **Industry First** Std. embedded OS or Opt. Windows 10 OS
- ✓ 12 bit Analog to Digital Converter
- ✓ >500,000 wfm/s update rate

Keysight S-Series

- ✗ Fixed configuration: 4 Analog; 16 digital
- ✗ 4 channel models only
- ✗ 15" XGA 1024 x 768 Multi-touch display
- ✗ Windows 7 only
- ✗ 10 bit Analog to Digital Converter
- ✗ Not Specified (*tested to 600 wfms/s)



Analog to Digital Converter (ADC)

Tektronix 5 Series MSO

- ✓ 12 bit ADC
- ✓ Up to 16 bits in new High Res mode
- ✓ 7.6 bits ENOB @ 1GHz 500mV Full Scale

Keysight S-Series

- ✗ 10 bit ADC
- ✗ Up to 12 bits in HiRes mode
- ✓ 7.6 bits ENOB @ 1GHz 500mV Full Scale

Included Probing


Tektronix 5 Series MSO

- ✓ 1 GHz passive probes (≥1GHz models)
- ✓ 3.9pF Capacitive loading
- ✓ Automated compensation
- ✓ Stores compensation data in memory
- ✓ Hardware Dynamic Range 5mV to 100V

Keysight S-Series

- ✗ 500 MHz passive probes (≥1GHz models)
- ✗ 9.5pF Capacitive loading
- ✗ Manual compensation
- ✗ Can't store compensation data
- ✗ Hardware Dynamic Range 16mV to 40V

Waveform Capture Rate*

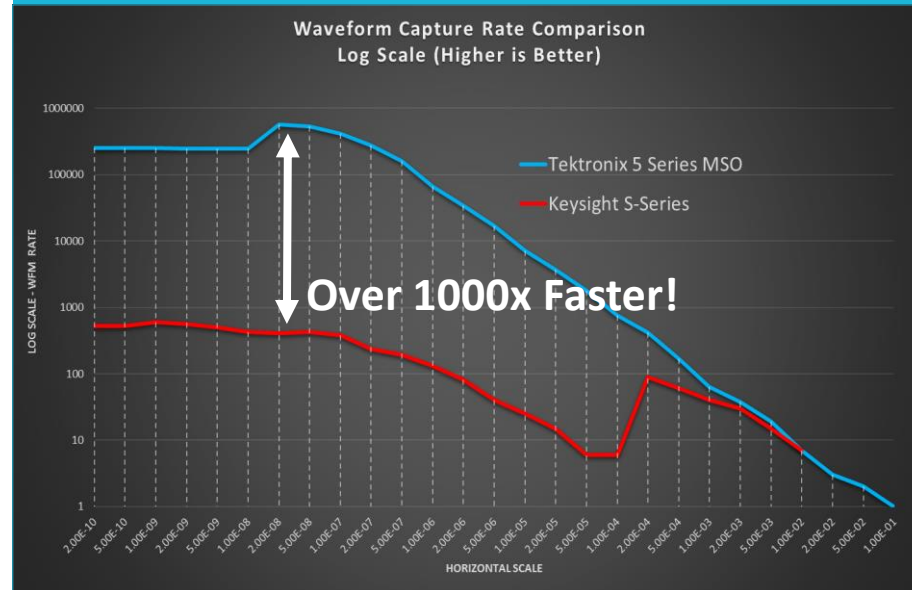

*Tektronix 5 Series and Keysight S-Series tested max Waveform Capture Rates by Tek Feb 2017

Tektronix 5 Series MSO vs. Keysight S-Series

COMPETITIVE FACT SHEET

Tektronix Confidential

Key Specifications Comparison

	Tektronix 5 Series MSO		Keysight S-Series	
Max Bandwidth (all channels)	✘	Up to 2.0 GHz	✓	Up to 4.0 GHz
Upgradable Bandwidth	✓	Yes	✓	Yes
Number of Analog Channels	✓	4, 6, or 8 with FlexChannels	✘	4
Number of Digital Channels	✓	Up to 32, 48, or 64 with FlexChannels	✘	16
Number of Math / Bus channels / Measurements	✓	As many as you want!	✘	16 math / 4 buses / 20 measurements
Max Analog Sample Rate (all channels)	✘	6.25 GS/s	✓	10 GS/s
Max Digital Channel Sample Rate (all channels)	✓	6.25 GS/s	✘	2 GS/s
Optional Arbitrary Function Generator (AFG)	✓	Yes – 50 MHz	✘	Not Available
Optional DVM/ Trigger Freq. Counter	✓	Yes – Free with Registration	✘	Not Available
Standard Analog Probes (≥1GHz models)	✓	1 GHz at 3.9pF	✘	500 MHz at 9.5pF
Standard Record Length (all channels)	✓	62.5 Mpts	✘	50 Mpts
Max Waveform Capture Rate	✓	>500,000 wfms/s	✘	Not Specified*
ADC Resolution	✓	12 bits	✘	10 bits
Max Vertical Resolution (with filtering)	✓	Up to 16 bits with New High Res mode	✘	Up to 12 bits with HiRes
ENOB** (at 1 GHz)	✓	7.6 bits	✓	~7.6 bits
Lowest Hardware Vertical Setting	✓	500uV/div = 5 mV Full Scale	✘	2 mV/div = 16 mV Full Scale
DC Gain Accuracy - Warranted	✓	1.0 %	✘	2.0 %
Screen Size & Resolution	✓	15.6" High Definition 1920 x 1080	✘	15" XGA 1024 x 768
Automated Search and Mark	✓	Search and Mark on Standard Triggers and Decoded Bus Events	✘	Only Search on Serial Decode Events
Operating System	✓	Std. Embedded OS or optional SSD with Windows 10	✘	Windows 7 Only

* Not specified by Keysight, but maximum rate measured by Tektronix was 600 wfms/sec ** ENOB tested by Tektronix, at 500mV Full Scale at 1 GHz and max sample rate